

Low Price, High Quality. We reduced the product price. But, we did not renounce to quality!





Available equipment:

STANDARD EQUIPMENT	My50 E	My50 B
Water and detergent management		
Eco On/OFF System* - Water filter	optional	optional
Fast water filling with drip stop	•	•
Water level indicator	•	•
Scrubbing performance		
Squeegee with	•	•
rubber blades usable on 4 sides		

STANDARD EQUIPMENT	My50 E	My50 B
Comfort		
FNC (FimapNoiseCanceling)	•	•
Fully sanitizable tanks	•	•
On-board battery charger	-	optional
Hour meter	•	•
Battery warning light	-	•
Battery charge level	-	•
Automatic brush coupling and uncoupling	•	•
Safety		
Non-marking wheels	•	•
Squeegee with shock-resistant coupling (BREAK AWAY)	•	•
Dead man's switch	•	•

* Eco ON/OFF system: automatically stops water flow when the machine is stationary.






My50 E/B scrubbing machine. AFFORDABLE,

because it does not need skilled operators for driving!



USER FRIENDLY DESIGN No operator training

You can start working with just 3 quick and simple operations!

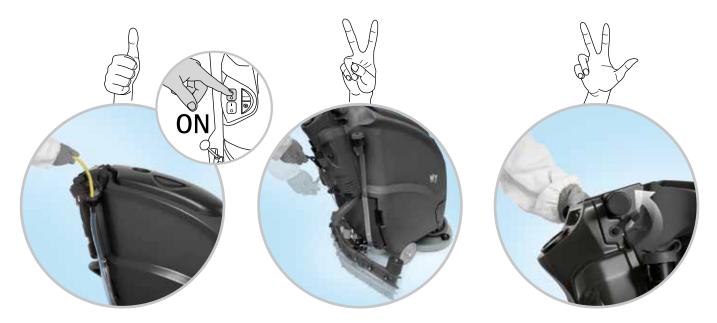

Fill in the solution tank and switch on the machine!

Lower the squeegee... ... and start to work!

My50 E/B scrubbing machine. AFFORDABLE, because it offers more autonomy



Autonomy up to 3 hours with 1 full charge





Non-stop work up to 1 hour and 2.000 sq.m with 1 fill of solution




System to adjust water consumption according to cleaning needs

My50 E/B scrubbing machine. AFFORDABLE, thanks to the new squeegee in reinforced plastic.




It is safer, because more resistant to impacts and corrosion. Automatic squeegee uncoupling when accidentally impacted



It can be easily cleaned at the end of cleaning operation, even by untrained operators. It is quick to be cleaned!

The easy identification of the parts involved in the daily maintenance (with yellow colour) ensures all parts' check and sanification at the end of work, guaranteeing the maximum efficiency of the machine

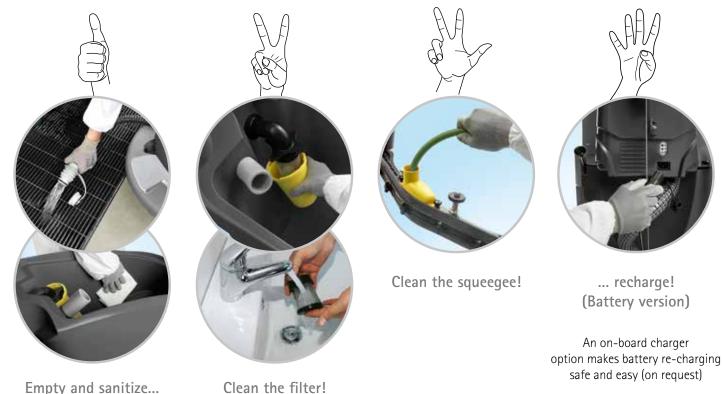

Clean the filter!

My50

TECHNICAL DATA		My50 E	My50 B
Productivity theoretical	up to sqm/h	-	1530
Working width	mm	510	510
Disc brushes	(no.) Ø mm	(1) 510	(1) 510
Brush motor	V/W	230/375	24/500
Brush rpm	rpm	135	135
Brush pressure	kg	27,5	27,5
Solution tank		35	35
Recovery tank		40	40
Suction motor	V/W	230/450	24/410
Vacuum water lift	mbar	104,5	104,5
Supply/traction	V/Hz	230/50	24/semi aut.
Batteries	(no.) V/Ah C5	-	(2) 12/80
Battery run time	up to h	-	2,95
Transport speed	km/h	3	3
Gradeability during transport empty	%	2	2
Machine dimensions (L x h x w)	mm	1165x990x545	1165x990x545
Squeegee width	mm	680-780	680-780
Machine weight empty without batteries	kg	61	61
Batteries weight	kg	-	54
Sound level (ISO 11201)	dB (A)	69	69

CERTIFICATIONS







For any additional information or for a demo please contact your usual Fimap dealer



FIMAP spa - Via Invalidi del Lavoro, 1 - 37059 S. Maria di Zevio - Verona - Italy Tel. +39 045 6060411 - Fax +39 045 6060417 - E-mail: fimap@fimap.com

